

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Problem Image Mailbox.**

10/634,636



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 130 233 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
05.09.2001 • Bulletin 2001/36

(51) Int Cl.7: **F01P 7/08, F01P 7/04**

(21) Application number: **01200636.7**

(22) Date of filing: **22.02.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

- Depoli, Erminio
Crema (CR) (IT)
- Bellotti, Claudio
Cerro Al Lambro (MI) (IT)
- Natale, Fabio
San Donato Milanese (MI) (IT)

(30) Priority: **29.02.2000 IT MI000382**

(71) Applicant: **Baruffaldi S.p.A.**
20097 San Donato Milanese, Milan (IT)


(74) Representative:
Raimondi, Alfredo, Dott. Ing. Prof.
Dott. Ing. Prof. Alfredo Raimondi S.r.l.
Piazzale Cadorna 15
20123 Milano (IT)

(72) Inventors:
• **Boffelli, Piercarlo**
Milano (IT)

(54) Coupling system for motor vehicle fans

(57) Device for transmitting the movement to a fan (1) for cooling the coolant in a motor vehicle, comprising movement generating means (3,21) on which the fan (1) is mounted by means of an idle support (1a), a first electromagnetic clutch (30), engagement of which causes rotation of the fan at a number of revolutions equal to that of the movement generating means; a second clutch (60;160;260;360), engagement/disengagement of which causes rotation of the fan at a number of revolutions lower than that of the movement generating

means or at zero revolutions; which comprises means (50;150;250;350) for engaging/disengaging the second clutch comprising an actuating element (41) coaxially displaceable, in both directions, with respect to the movement generating means (3;21), but idle upon rotation of the latter; coupling means (47;147;247c;347) which are coaxially locked in rotation with the movement generating means (3;21) and connected to said displacement actuating element (41) and are suitable for engagement with the rotor (61;161;261;361) of the said second clutch (60;160;260;360).

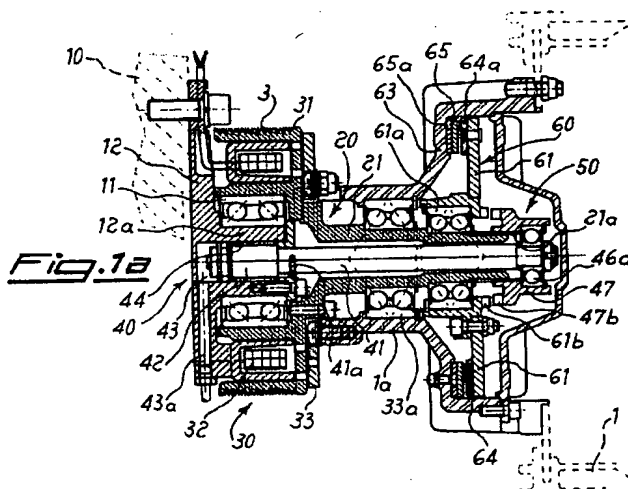

Description

[0001] The present invention relates to a device for transmitting the movement to a fan for cooling the coolant in a motor vehicle, comprising a first electromagnetic clutch, a second clutch and means for engaging/disengaging the second clutch, comprising an actuating element coaxially displaceable, in both directions, with respect to the movement generating means, but idle upon rotation thereof.

[0002] It is known in the technical sector relating to the cooling of coolants contained in motor-vehicle radiators that there exists the need to force air onto the radiator in order to obtain more rapid dissipation of heat from the coolant to the exterior, said forced air flow being obtained by causing rotation of a fan which is normally mounted either directly on the crankshaft or on the water pump shaft or on a driven and fixed shaft carrying a pulley which receives movement from a belt actuated by the crankshaft.

[0003] It is also known that said fan must be made to rotate only upon reaching a certain predefined temperature of the water detected by means of a thermostat which activates an electromagnetic clutch, closing of which causes the fan to start rotating.

[0004] Said electromagnetic clutches cause the fan to start rotating at the speed of rotation of the actuating pulley, without the possibility of causing a variation in the speed of rotation of the fan depending on the variation in speed of actuation thereof.

[0005] More particularly it is required that a motor vehicle fan must be able to rotate:

- at a lower speed than that of the transmission shaft for cooling in low external temperature conditions;
- at a speed equal to or even greater than that of the transmission shaft in the case of higher external temperatures or use in severe conditions which cause overheating of the engine;
- at zero speed, namely with the fan which does not rotate at all and remains in an idle condition with respect to the transmission shaft, in the case of particularly low temperatures at which further cooling is of no use or even damaging.

[0006] In an attempt to achieve these performance features, coupling systems of the mixed type with electromagnetically operated friction clutches and drive couplings based on the use of parasitic currents generated by rotation of a conducting element in the vicinity of permanent magnets have been developed.

[0007] This solution is, for example, known from DE-32 03 143 which describes an arrangement in which the crankshaft is connected to the rotor of an electromagnetic clutch, engaged by an armature connected to the fan for direct driving, whereas low speed conditions make use of the engagement between a conducting disk, rotating with the transmission shaft, and the per-

manent magnets integral with the fan, said engagement causing transmission of movement at a low speed as a result of relative slipping between the two parts.

[0008] With this solution, however, it is not possible to obtain the idle condition of the fan.

[0009] In order to overcome this drawback, EP-0,317,703 described a coupling which, adopting the solution disclosed by the preceding patent DE-32 03 143, also envisages a second electromagnetic clutch which, in combination with the others, is able to achieve the three different operating conditions, but requires the manufacture of a special bearing, which is not standard and is expensive and difficult to produce.

[0010] Both the solutions also have a structural limitation consisting in the fact that the slow speed is predetermined by the size of the permanent magnets necessary for operation of the clutch and it is therefore not possible to regulate the slow speed of rotation of the fan within a variable range corresponding to the actual temperature conditions of the engine.

[0011] In addition to this, the particular configuration of the engine compartments of motor vehicles for which said devices are intended requires, in particular in the case of a fan supported by a fixed shaft carrying the actuating pulley, the positioning of large projecting rotational masses at a considerable distance from the point of attachment of the fixed shaft supporting the fan, with obvious drawbacks resulting in the need, among other things, for brackets and fixtures for the whole assembly; this gives rise to a further increase in the dimensions, technical difficulties in configuration of the parts - due to the presence in the engine compartment of other engine parts - and a consequent overall increase in the manufacturing costs. The technical problem which is posed, therefore, is that of providing a device for transmitting the rotational movement to a fan for cooling the coolant of motor vehicles, which is actuated by a single actuating means and allows the fan to rotate at a controllable number of revolutions adjustable depending on the actual cooling requirement of the engine, which also includes the possibility of keeping the fan stationary in the case of very low external temperatures.

[0012] In connection with this problem a further requirement is that the device should have compact dimensions without high and costly projecting rotational masses and should be controlled by means of direct detection of the temperature of the coolant.

[0013] These technical problems are solved according to the present invention by a device for transmitting the movement to a fan cooling the coolant of a motor vehicle, comprising movement generating means on which the fan is mounted by means of an idle support, a first electromagnetic clutch, engagement of which causes rotation of the fan at a number of revolutions equal to that of the movement generating means; a second clutch, engagement/disengagement of which causes rotation of the fan at a number of revolutions lower than that of the movement generating means or at zero

revolutions; means for engaging/disengaging the second clutch comprising an actuating element coaxially displaceable, in both directions, with respect to the movement generating means, but idle upon rotation of the latter; engaging means which are coaxially locked in rotation with the movement generating means and connected to said displacement actuating element and suitable for engagement/disengagement with the rotor of the said second clutch.

[0014] Further details may be obtained from the following description of a non-limiting example of embodiment of the invention, provided with reference to the accompanying drawings in which:

- Figs. 1a,1b show a schematic axial section through the device for transmitting the movement to the fan according to the invention with an induction clutch and toothed coupling, in the open and closed position, respectively;
- Figs. 2a,2b show a schematic axial section through the device for transmitting the movement to the fan according to the present invention with an induction clutch and friction-element coupling, in the open position and closed position, respectively;
- Figs. 3a,3b show a schematic axial section through the movement transmission device with a magnetic-hysteresis clutch and toothed and friction coupling, respectively; and
- Figs. 4a,4b show a schematic axial section through the device for transmitting the movement to the fan according to the present invention with an induction clutch and clutch air-gap control coupling, in the engaged and disengaged position, respectively.

[0015] As shown in Fig. 1a, 1b, the device for transmitting the movement to a motor-vehicle cooling fan 1 is arranged between the fan 1 itself and an actuating shaft 20 integral with a pulley 3 connected to the crankshaft by means of a belt (not shown). For the sake of convenience of the description below, "longitudinal direction" will be understood as being that direction parallel to the longitudinal axis of the actuating shaft 20.

[0016] In greater detail the actuating shaft consists of a hollow sleeve 21, one end of which is connected to a rotor 31 integral with the pulley 3 and mounted on a bearing 11 keyed onto a suitable hollow extension 12a of a support flange 12 integral with the base 10 of the engine.

[0017] Said rotor 31 forms the rotating element of an electromagnet clutch 30 formed by an annular electromagnet 32 concentric with the rotor and arranged between the latter and the fixed flange 12 and electrically connected to a thermostat (not shown) for example for the cooling-water temperature.

[0018] The armature 33 of the clutch 30 is arranged on the opposite side to the electromagnet 32 with respect to the rotor 31, being connected to a bell 1a which supports the fan 1 and which is mounted on a bearing

33a in turn keyed onto the hollow sleeve 21.

[0019] The hollow sleeve 21 has, coaxially arranged inside it, the rod 41 of a device 40 for actuating in the longitudinal direction a coupling 50 of a second clutch 60, the rotor 61 of which is mounted on a bearing 61a keyed onto the sleeve 21 and the armature 63 of which consists of a suitable portion of the bell 1a supporting the fan 1.

[0020] Said second clutch is of the induction type based on parasitic or Foucault currents and comprises a plurality of permanent magnets 64 which are supported by a retaining ring 64a made of non-magnetic material and integral with the rotor 61 and a first ring 65 made of conductive material and supported by a second ring 65a mounted on a non-magnetic support consisting of the said part 63 of the bell 1a.

[0021] In this way the rotor 61 and the magnets 64 form the induction linkage elements able to cause rotation of the bell 1a and therefore the fan 1.

[0022] The said coupling device 40 of the second clutch 60 consists of said rod 41, one end of which is rigidly joined to a piston 42 sliding inside a cylinder 43 to which the actuating fluid is supplied by means of an associated duct 43a which causes the forwards movement of the rod 41 longitudinally and outwards against the thrusting action of a spring 44 which tends to cause the rod 41 to return into the retracted position.

[0023] Said cylinder may be conveniently of the pneumatic/hydraulic/oil-hydraulic type.

[0024] Alternatively, actuation of the coupling may also be of the electromechanical type.

[0025] Said rod is prevented from rotating by means of a radial stop element 41a integral with the fixed flange 11.

[0026] At the free end of the rod, opposite to that of the piston 42, a bearing 46a which supports a crown wheel 47 axially sliding on a guide 21a of the sleeve 21 and integrally movable in rotation with the latter is mounted. The longitudinal teeth 47b of the wheel 47 are designed to mesh with corresponding and opposite front teeth 61b of the rotor 61.

[0027] The operating principle of the coupling is as follows:

- the cylinder 43 is kept normally supplied under pressure so as to overcome the resistance of the spring 44 and bring the rod 41 into the extracted position for uncoupling the coupling 47,47b from the rotor 61,61b which thus remains stationary;
- if the electromagnet 32 is kept deactivated, the armature 33 of the clutch remains separated from the rotor 31 and the fan 1 remains in an idle condition with respect to the movement generating sleeve 21;
- if the electromagnet 32 is activated, the armature 33 is recalled so as to make contact with the rotor 31, together with which it starts to rotate, causing the rotation of the bell 1a, and therefore the fan 1, at a number of rotations equal to that of the actual-

ing shaft;

- if the electromagnet 32 is kept deactivated and the cylinder 43 is discharged, the thrusting action of the spring causes the recall, inwards, of the rod 41 which axially displaces the coupling 50, causing meshing of the front teeth 47b and 67b and therefore rotation of the rotor 61 of the second clutch 60; said rotation causes the formation of parasitic currents between the elements 64 and 65 of the clutch 60 which cause rotation of the bell 1a and therefore the fan 1.

[0028] Since driving of the bell by the rotor 61 occurs with a relative slippage, the fan will rotate at a speed lower than that of the shaft 21.

[0029] It can therefore be understood how the transmission device according to the invention is able to ensure the three required speeds of rotation of the fan (number of revolutions equal to or less than those of the movement generating shaft or zero revolutions) without large rotating loads projecting from the fixed support and with control produced by direct detection of the water temperature.

[0030] In addition to this, the longitudinal movement of the rod 41 between two mechanically defined end-of-travel stops ensures substantial elimination of the possibility of error by the coupling of the second clutch; moreover, the fact that engagement of the second clutch is determined by the thrusting action of the spring 44 ensures that rotation of the fan, and therefore cooling of the engine, is ensured also in the event of malfunctions which prevent correct actuation of the first and second clutch by the various control circuits.

[0031] Figures 2a,2 show a first variation of embodiment of the device according to the invention in which the coupling 150 of the second clutch 60 is formed by elements 147b with a high coefficient of friction arranged on the wheel 147 integral with the rod 41; in this configuration the production of the device is further simplified.

[0032] Figs. 3a to 3b show devices similar to those described in relation to Figs. 1a,2a in which the second clutch 260 is of the magnetic hysteresis type instead of the induction type.

[0033] In this case, the permanent magnets 264 supported by a ring 264a are arranged on the rotor 261, while a ring 265 made of magnetically semi-hard material is joined to the bell 1a.

[0034] Engagement of the second clutch 260 may again be performed by the same toothed coupling 47b or friction coupling 147b already described in connection with the induction clutch 60,160.

[0035] Both in the case of a second induction clutch and in the case of a second hysteresis clutch it is envisaged that the associated rotor is able to position linkage elements so that they are arranged facing the opposite sides of the rotor in order to balance the axial thrusts which are generated on the bearing, producing at the same time an increase in the driving torque.

[0036] Figs. 4a and 4b, finally, show a further embodiment of the device according to the invention in which engagement of the second clutch 360 is obtained by controlling the size of the air-gap, i.e. the distance between the elements 364 and 365a which produce linkage between the rotor 361 and support bell 1a of the fan 1. In greater detail the coupling 350 is formed by an annular flange 347 rigidly joined to the rod 41 in a manner entirely similar to that already described in relation to Fig. 1a.

[0037] In this case, however, the flange 347 is stably joined to the rotor 361 of the second clutch 360 so that actuation of the rod 41 in the longitudinal direction produces:

- in one direction: movement of the rotor and hence the conducting elements 364 towards the corresponding conducting elements 365a of the bell 1a, thereby producing linkage and rotational driving of the fan 1;
- in the other direction: movement of the rotor 361 away from the bell 1a and therefore an increase of the air-gap between the conducting elements 364,365a such as to neutralise substantially the formation of parasitic linkage currents and therefore rotational driving of the bell 1a which remains stationary in the idle condition together with the fan 1.

[0038] With this coupling configuration, which may be realised both for induction clutches and magnetic hysteresis clutches, it is also possible to achieve substantially continuous control of the speed of rotation of the fan since, by suitably adjusting displacement of the rod 41, the size of the air-gap is correspondingly adjusted, resulting in greater/lesser relative linkage and therefore a greater/smaller transmitted torque corresponding to an adjustment in the revolutions of the fan.

[0039] In greater detail, it is envisaged that said adjustment of the distance is performed by corresponding means for adjusting the pressure of the fluid in the cylinder, or by a double-acting cylinder, or by means of the electromechanical type able to produce different equilibrium positions with respect to the spring 44.

Claims

1. Device for transmitting the movement to a fan (1) for cooling the coolant in a motor vehicle, comprising:
 - movement generating means (3,21) on which the fan (1) is mounted by means of an idle support (1a);
 - a first electromagnetic clutch (30), engagement of which causes rotation of the fan at a number of revolutions equal to that of the movement generating means;



- a second clutch (60;160;260;360), engagement/disengagement of which causes rotation of the fan at a number of revolutions lower than that of the movement generating means or at zero revolutions;

characterized in that it comprises:

- means (50;150;250;350) for engaging/disengaging the second clutch comprising an actuating element (41) coaxially displaceable, in both directions, with respect to the movement generating means (3;21), but idle upon rotation of the latter;
 - engaging/disengaging means (50;150;350) which are coaxially locked in rotation with the movement generating means (3;21) and connected to said displacement actuating element (41), said engaging means comprising coupling elements (47;147;347) suitable for engagement/disengagement with the rotor (61;161;261;361) of the said second clutch (60;160;260;360).
2. Device according to Claim 1, **characterized in that** said first clutch is supported in a position substantially adjacent to the casing of the engine.
 3. Device according to Claim 1, **characterized in that** said first clutch (30) comprises an electromagnet (32) coaxially mounted inside the rotor (31) integral with a movement generating pulley (3).
 4. Device according to Claim 1, **characterized in that** said second clutch (60;260;360) is coaxially supported in a position substantially projecting from the base of the engine.
 5. Device according to Claim 1, **characterized in that** said coupling actuating element (41) consists of a rod (41) coaxially arranged inside the movement generating means (3;21).
 6. Device according to Claim 1, **characterized in that** said coupling actuating element (41) is associated with corresponding displacement actuating means (43,44).
 7. Device according to Claim 3, **characterized in that** said displacement actuating means (44) consist of a piston (42) moved by a cylinder (43,43a) against the thrusting action of a return spring (44).
 8. Device according to Claim 7, **characterized in that** said cylinder is of the pneumatic/hydraulic/oil-hydraulic type.
 9. Device according to Claim 3, **characterized in that**

said displacement actuating means are of the electromechanical/electromagnetic type.

10. Device according to Claim 1, **characterized in that** said actuating element (41) has at its free end a bearing (46a) on which said coupling means (47;147;347) are mounted.
11. Device according to Claim 1, **characterized in that** said coupling means consist of a crown wheel (47) with front teeth (47b).
12. Device according to Claim 11, **characterized in that** the rotor (61) of the second clutch (60) has front teeth (61b) suitable for meshing with the teeth (47b) of the said wheel (47).
13. Device according to Claim 1, **characterized in that** said coupling means consist of a disk (147) supporting elements (147b) with a high coefficient of friction suitable for direct engagement with the opposite surface of the rotor (61) of the second clutch (60).
14. Device according to Claim 1, **characterized in that** said coupling means consist of an annular flange (347) which is stably joined to the rotor (361) of the second clutch (360).
15. Device according to Claim 1, **characterized in that** said second clutch is of the parasitic-current type.
16. Device according to Claim 1, **characterized in that** said second clutch is of the magnetic-hysteresis type.
17. Device according to Claim 15 or 16, **characterized in that** said second clutch is of the simple engaging/disengaging type.
18. Device according to Claim 14, **characterized in that** said second clutch (360) comprises means for controlling the distance of the rotor (361) from the fan support bell (1a), able to control the amount of the air-gap distance between the conducting elements and the magnetic elements from a maximum driving-torque engaged position to a zero driving-torque disengaged position.
19. Device according to Claim 18, **characterized in that** said means for controlling and adjusting the air-gap distance are designed to ensure substantially continuous adjustment of the driving torque between the maximum engaged position and zero disengaged position.

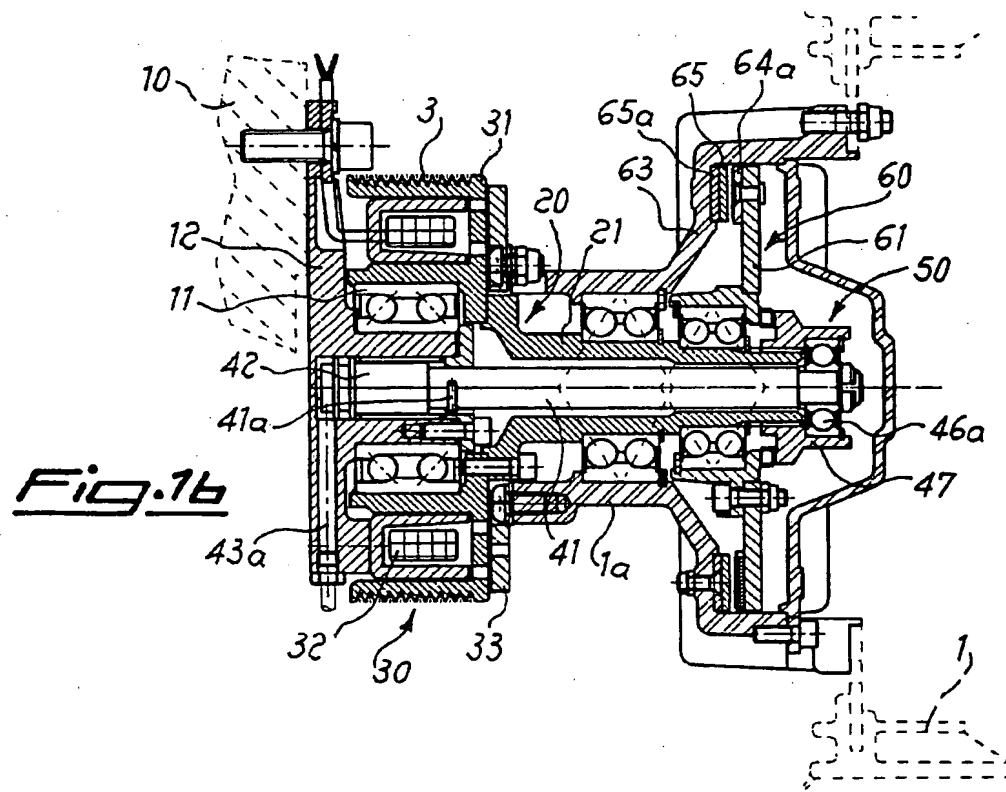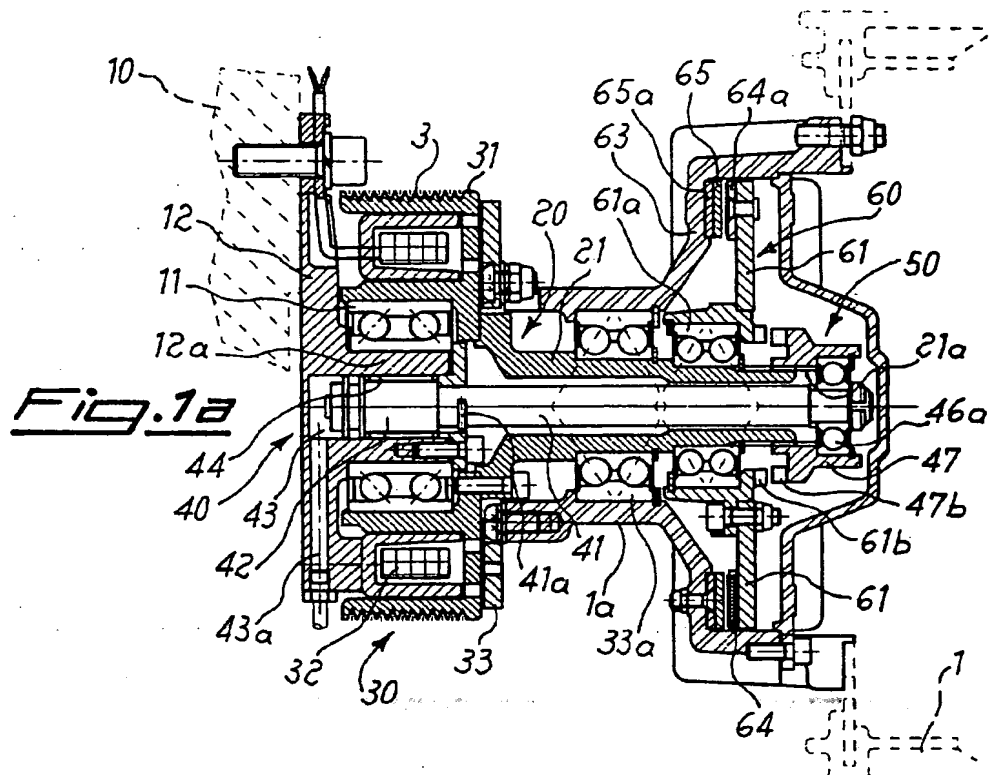

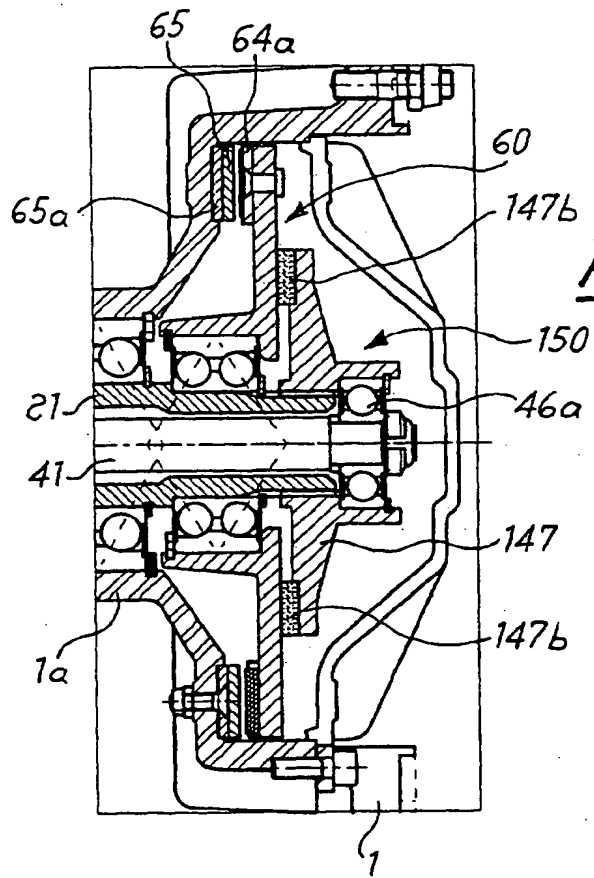


Fig. 2b

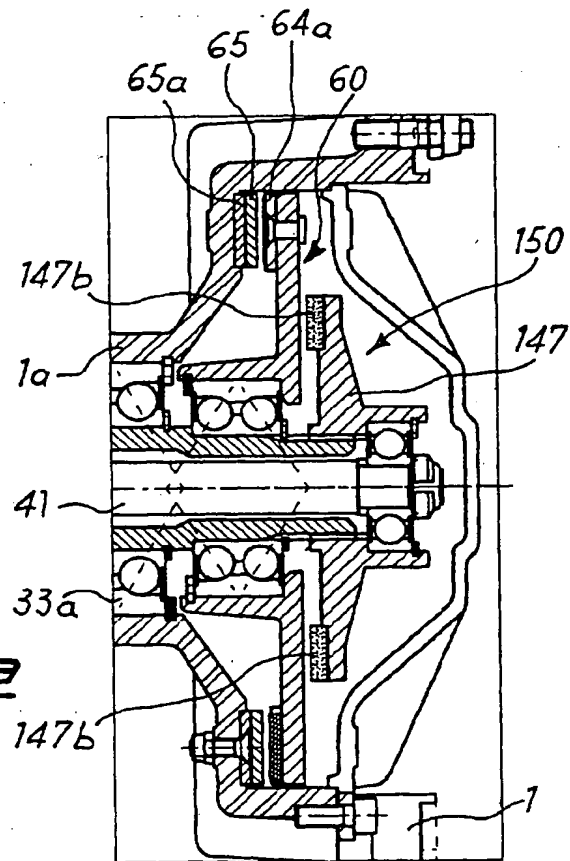


Fig. 2a

Fig. 3a


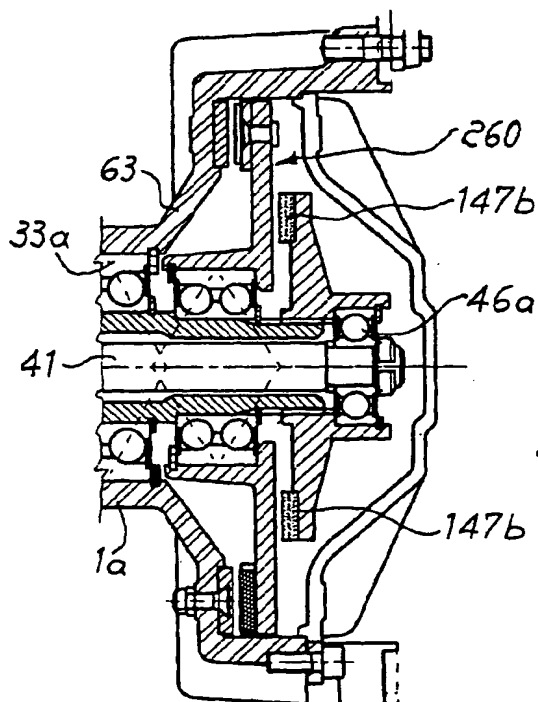


Fig. 3b

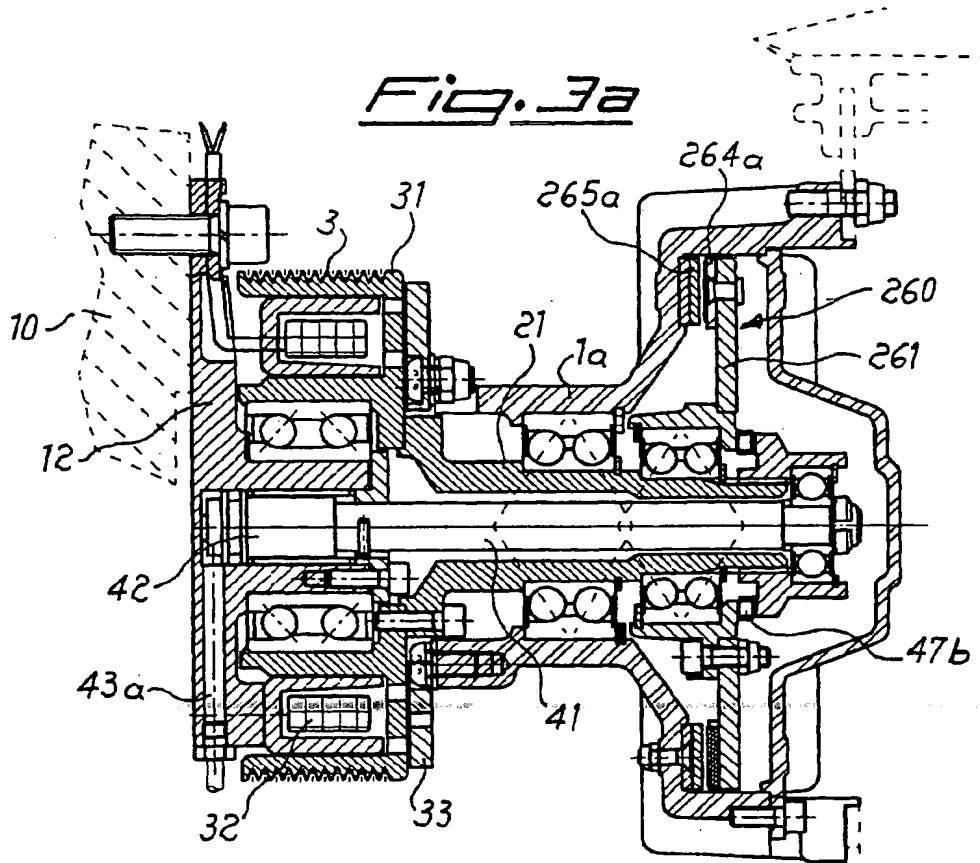